



SECTIONAL ELEVATION

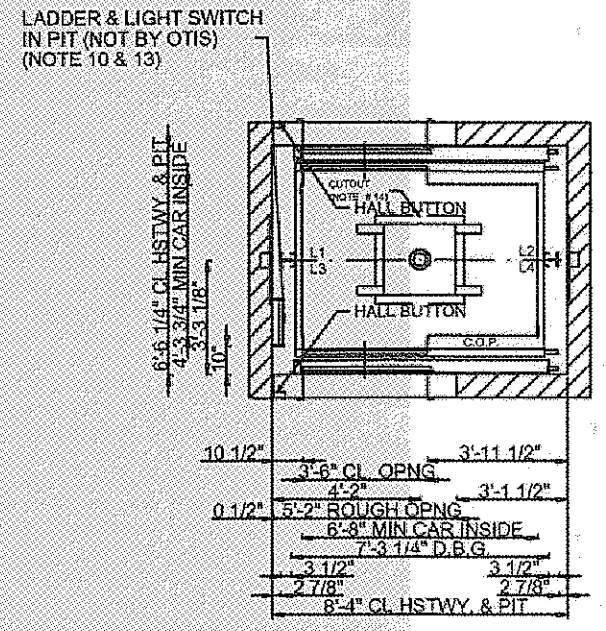


PLAN VIEW

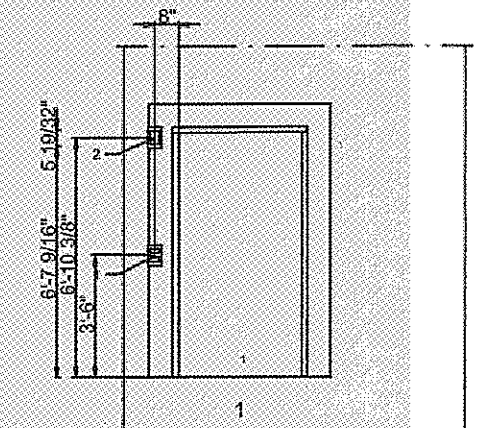

- 1. HALL BUTTON AT ALL FLOORS
- 2. OPTIONAL HALL POSITION INDICATOR OR HALL LANTERN (TYPICAL LOCATION WITH 7'-0" / 2134 OPENING).

ENTRANCE VIEW

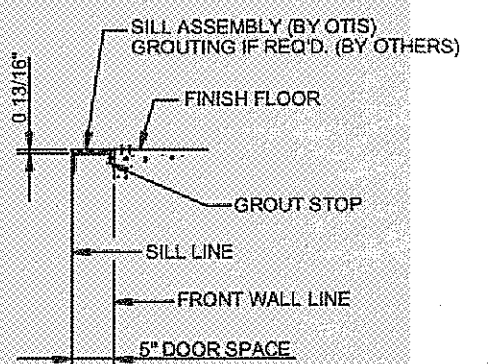

DETAIL "A"
ADEQUATE SUPPORT AT ALL FASTENING POINTS OF ENTRANCE ASSEMBLY REQUIRED. (NOT BY OTIS)

NOTE A:
IF A FALL HAZARD EXISTS, INCREASE DIMENSION BY 5".

RAIL FORCE & BRACKET DETAIL		
R1	R2	MAXIMUM BRACKET SPACING
198 lbs	80 lbs	14'

LVM 2500R
Passenger
Model Hydraulic
2500 lbs. @ 125 F.P.M.

APPROVAL SHEET 2 OF 2

APPROVAL	
SIGNED	DATE
GUARANTEE HOISTWAY SIZE GUARANTEED PLUMB WITHIN 1" / 25mm BUT NOT LESS THAN FIGURES SHOWN	
SIGNED	DATE