


- SYMBOL LEGEND**
- INCANDESCENT FIXTURE
 - FLOURESCENT FIXTURE
 - DUPLEX RECEPTACLE M.H. 18" UNLESS NOTED
 - SINGLE POLE TOGGLE SWITCH M.H. 18"
 - 2-WAY SWITCH M.H. 18"
 - LIGHTING PANEL (L.P.)
 - CONDUIT RUN IN CEILING OR WALL, CROSS-HATCH
 - INDICATES NUMBER OF WIRES IN CONDUIT
 - CONDUIT RUN IN SLAB OR UNDERGROUND, CROSS-HATCH SAME AS ABOVE
 - JUNCTION BOX M.H. 18" UNLESS NOTED
 - ▽ W.P. WEATHER PROOF
 - TELEPHONE OUTLET M.H. 18"
 - MAIN DISTRIBUTION PANEL (M.D.P.)
 - 100 ROOM NUMBER
 - 4-WAY SWITCH M.H. 18"
 - FLOOR OUTLET - RUSSELL & STOLL #2510
 - FLOOR OUTLET - ARROW-HART #7797 W/PENDANT SW. #3672 1/2 G.C. CAT. #GE 2073-1 "CORD.
 - WALL MOUNTED EXIT LIGHT
 - CEILING MOUNTED EXIT LIGHT
 - SPEAKER OUTLET ON CEILING
 - MOTOR OUTLET - HP INDICATED
 - DISCONNECT SWITCH - SIZE INDICATED
 - WEATHERPROOF DISC. SW. - SIZE INDICATED
 - FLOODLIGHTS MOUNTED ON BUILDING

- GENERAL NOTES**
- 1) ALL LIGHT FIXTURES & LAMPS TO BE FURNISHED BY OTHERS. THIS CONTRACTOR TO UNPACK, DISTRIBUTE, WIRE, AND INSTALL ALL FIXTURES & LAMPS.
 - 2) FOR OUTLETS FURTHER THAN 75' FROM L.P. USE #10 WIRE. FOR OUTLETS FURTHER THAN 150' FROM L.P. USE #8 WIRE.

NOTES

- 1) ALL LIGHTING CIRCUITS OPERATED BY DIMMER ARE TO BE WIRED TO SAME HOT BUS IN L.P.-A.
- 2) ALL EXIT LIGHTS ON THIS FLOOR TO BE ON ONE CIRCUIT TO LEE.

MAIN FLOOR ELECTRICAL PLAN
SCALE 1/8" = 1'-0"

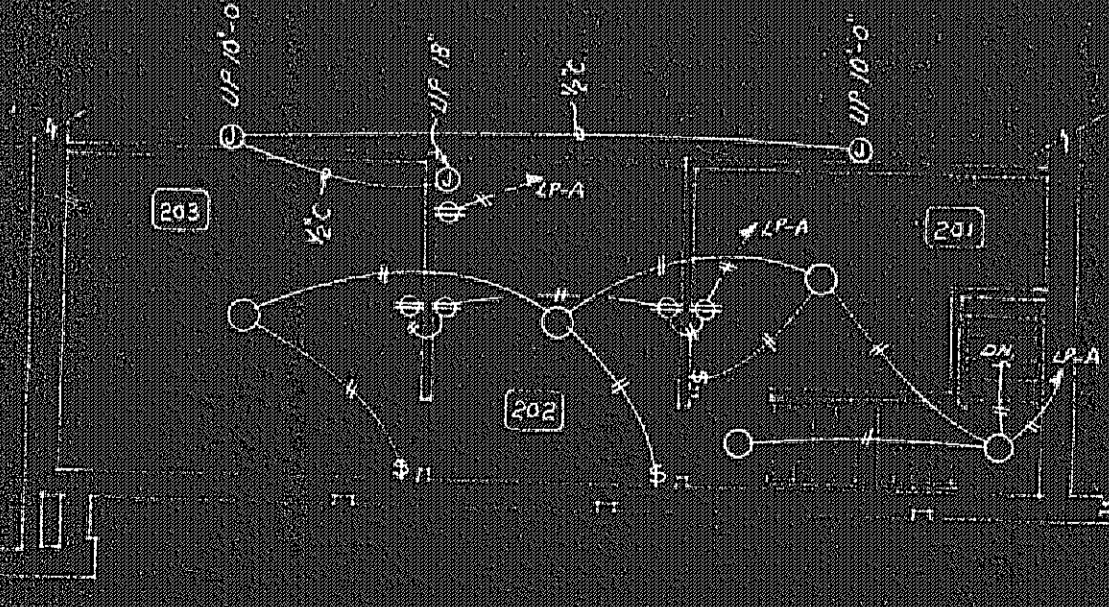

MEZZANINE ELECTRICAL PLAN
SCALE 1/8" = 1'-0"

